


BZ-Zyklon

Flüssigkeitsabscheider
Separator for separation of liquids

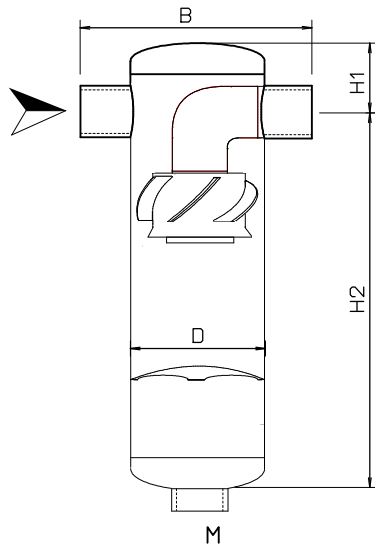

Standard 15 – 100 Gewindeanschluß

Standard 15 – 100
screw connection

Material:

Stahl geschweißt, außen grundiert RAL 2002
Steel welding design, outside priming coat RAL 2002

Anschlüsse: Innengewinde
connection: pipe thread

Abnahme: gem. DGRL 2014/68 + AD2000
Inspection: acc. PED 2014/68+ AD2000

Designtemperatur: -10 / +120 °C
Design temperature:

Type BZ	DN	D Ø	H1	H2	B	M	barg	G-Ltr.	S - Ltr.	kg
15	½"	63,5	90	360	120	½"	25	1,1	0,4	2,6
20	¾"	63,5	90	360	120	½"	25	1,1	0,4	2,8
25	1"	101,6	100	360	160	1"	25	3,2	0,9	5,5
32	1 ¼"	101,6	100	450	170	1"	25	3,9	1,7	6,5
40	1 ½"	127	110	450	190	1"	16	6,0	2,3	10
50	2"	152,4	130	450	230	1"	16	8,9	3,0	15
65	2 ½"	177,8	140	480	270	1"	16	13	3,4	16
80	3"	219,1	170	480	330	1"	10	22	3,3	22
100	4"	267	190	610	380	1"	8	40	8,8	32

G-Ltr: Gesamtvolumen – volume / S-Ltr.: Sammelraum – collecting room
Sonderausführungen auf Anfrage / Special Version on request

