


H+S - Demister

Demisterabscheider Mesh-Separator

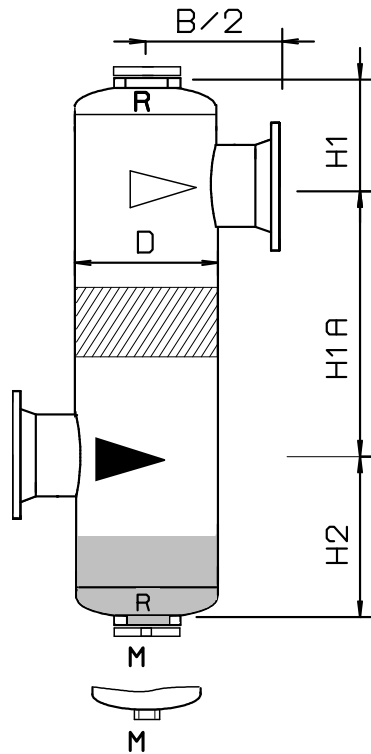

Standard 50 - 250 ohne Behälterflanschen

*Standard 50 - 250
without vessel flanges*

Material:

C-Stahl geschweißt, außen grundiert RAL 2002
Carbon-Steel welding design, outside priming coat RAL 2002

Anschlüsse: Flansche nach EN 1092-1
connection: flanges acc. EN 1092-1

Abnahme: gem. DGRL 97/23 + AD2000
Inspection: acc. PED 97/23 + AD2000

Designtemperatur: -10 / +120 °C
Design temperature:

Type BZ	DN	D Ø	H1	H1A	H2	B/2	R	M	barg	G-Ltr.	S - Ltr.	kg
50	50	152,4	155	420	315	180	--	1"	16	13	2,2	22
65	65	177,8	175	460	315	200	--	1"	16	20	3,0	23
80	80	219,1	190	520	290	230	--	1"	10	35	3,9	29
100	100	267	210	580	310	260	--	1"	8	55	5,5	39
125	125	323,9	235	630	335	305	129	1"	7	90	9,0	65
150	150	368	270	720	40	350	129	1"	6	135	14	80
175	200	419	285	760	445	430	129	1"	6	190	22	124
200	200	500	330	880	540	450	129	1"	6	310	37	152
225	250	550	360	960	580	475	129	1"	6	410	44	178
250	250	600	400	1000	700	500	129	1"	6	545	80	210

G-Ltr.: Gesamthalt – volume / S-Ltr.: Sammelraum – collecting room
Sonderausführungen auf Anfrage / Special Version on request

Drahtgestricke innen aus VA-Stahl
Wire-mesh made of stainless steel



Haub + Schöllnhammer Apparatebau GmbH

Hundemstrasse 132 * 57368 Lennestadt

Phone 0049 (0) 2723 9240-0 * Fax 0049 (0) 2723 9240-30 * www.haub-schoellnhammer.de * info@haub-schoellnhammer.de